

Fig.15  $C_B = 0.798$  &  $0.799$



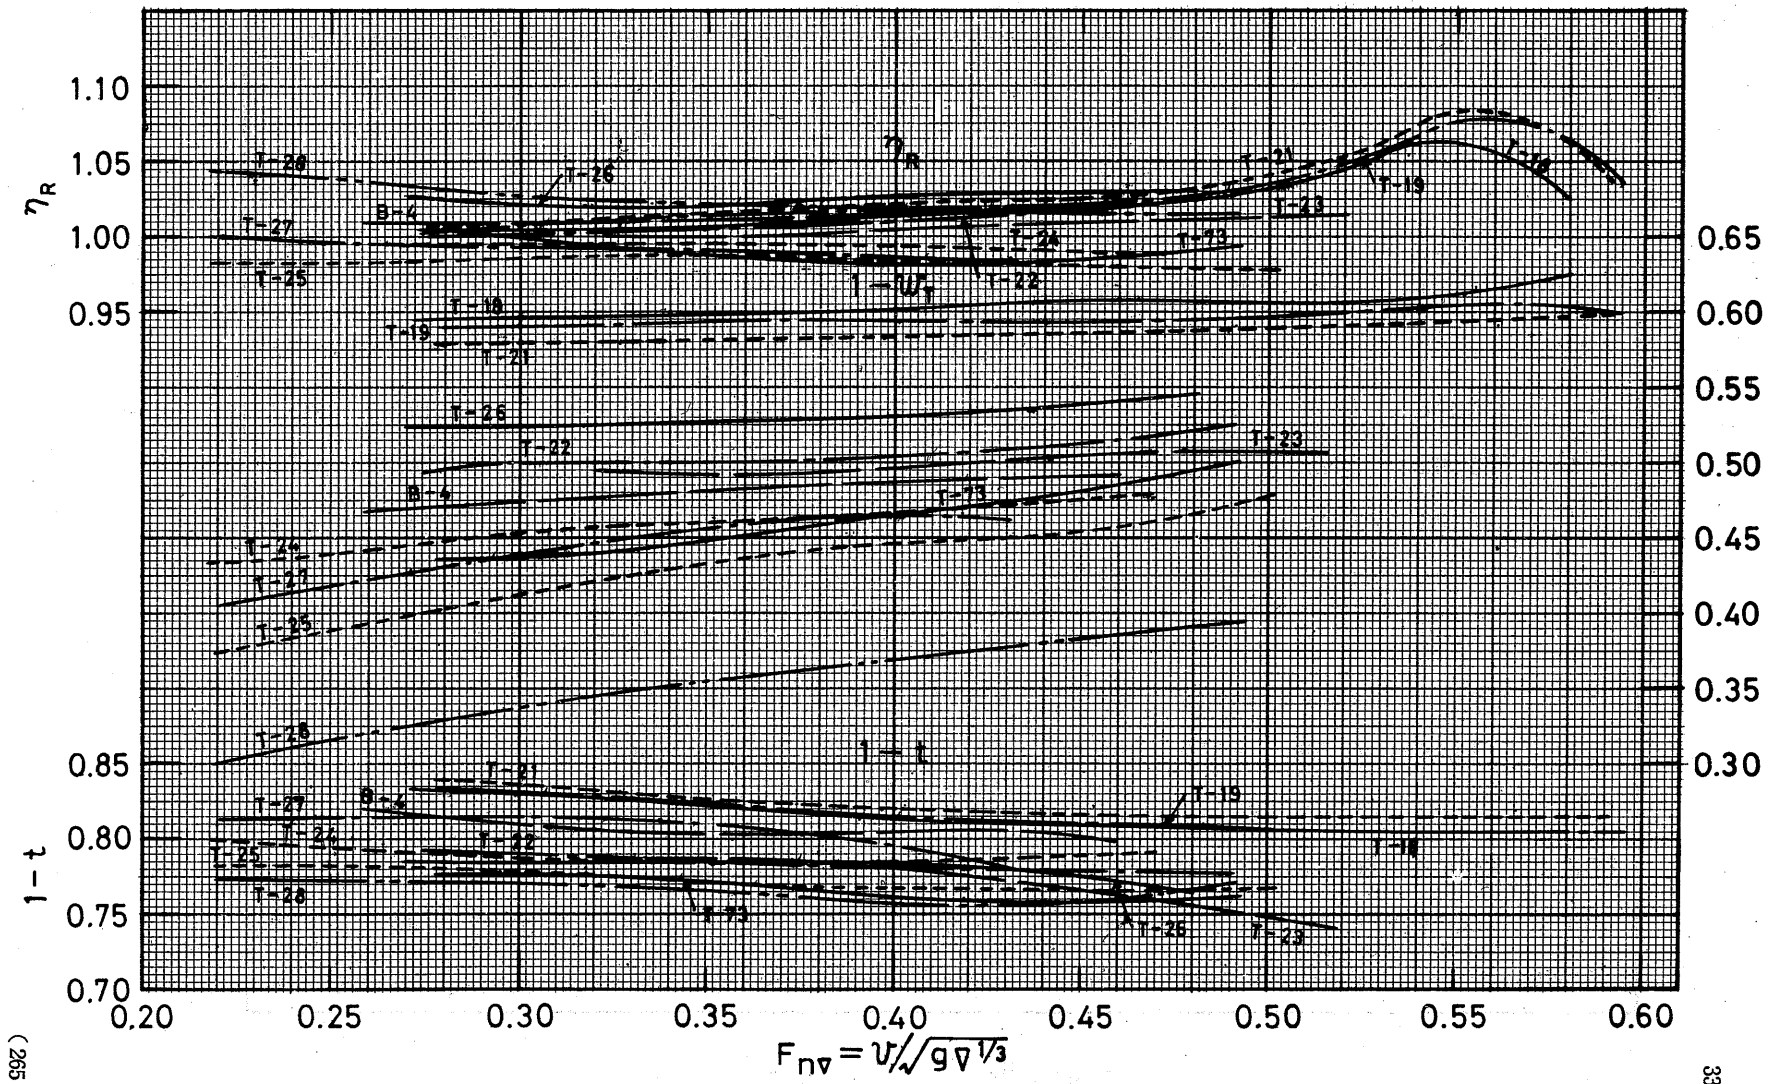


Fig.16  $C_B = 0.800$  &  $0.801$

(265)



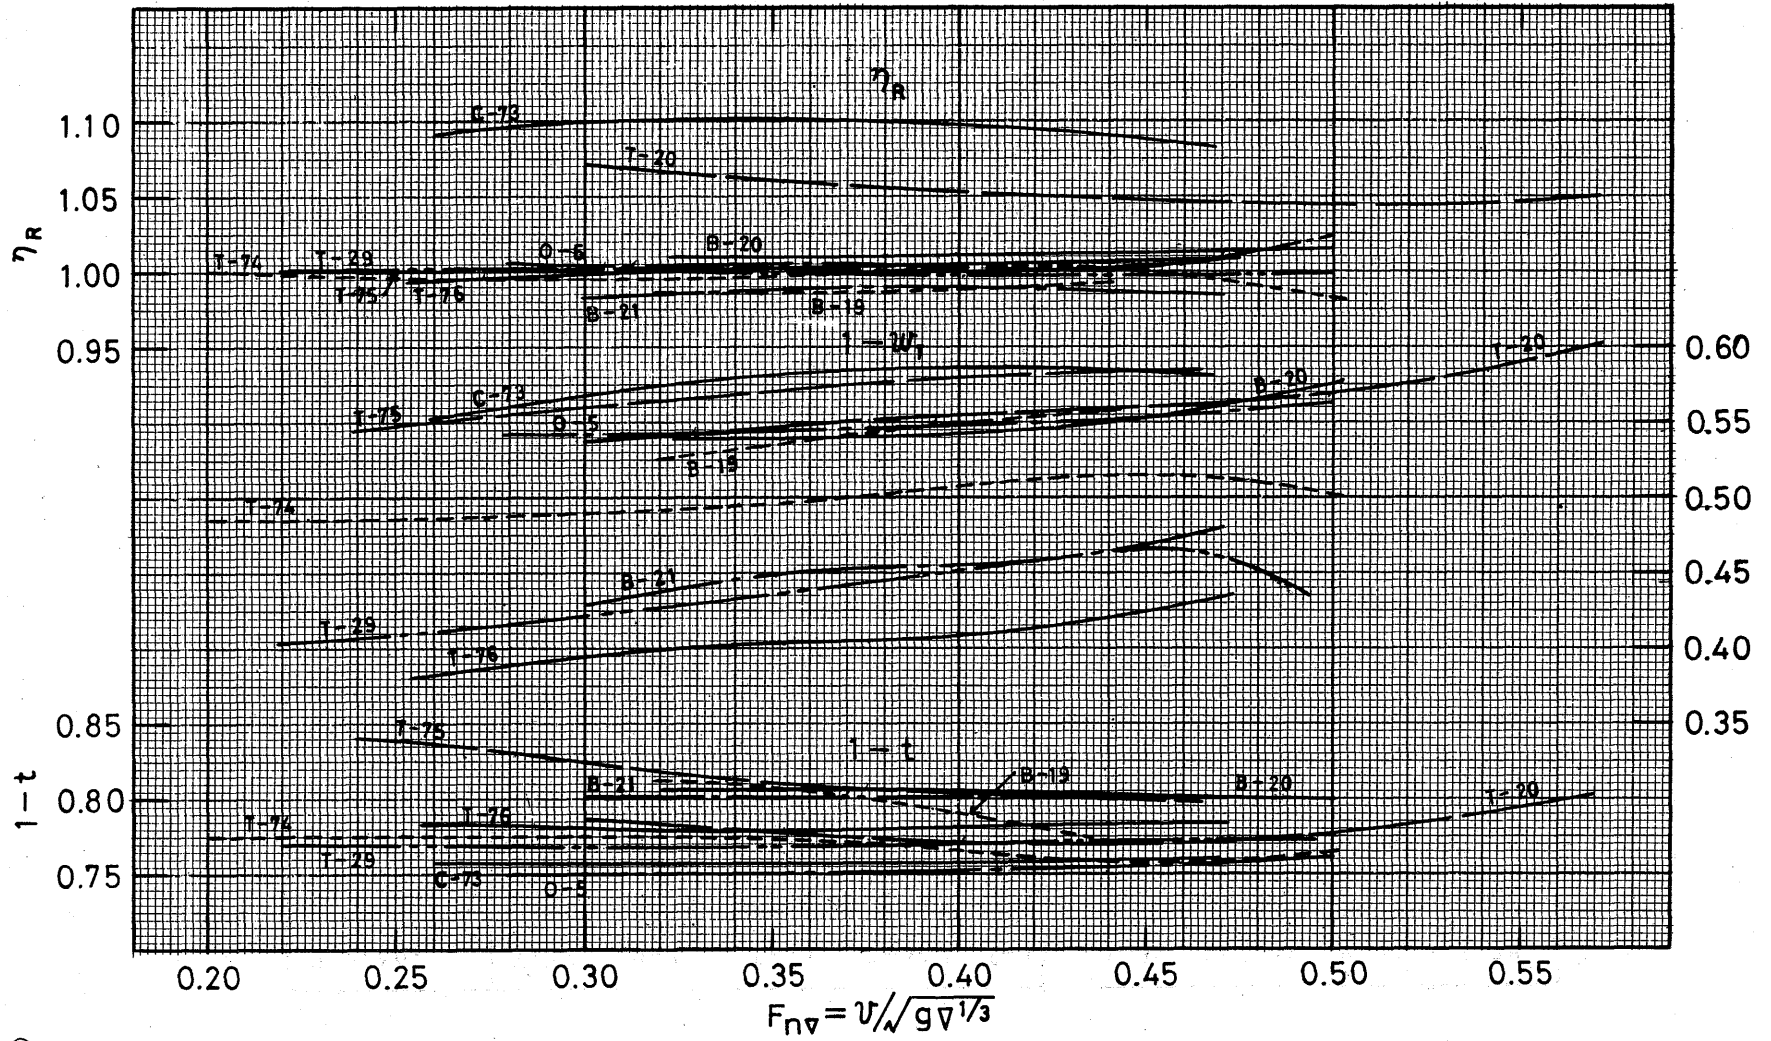


Fig.17  $C_B = 0.802$



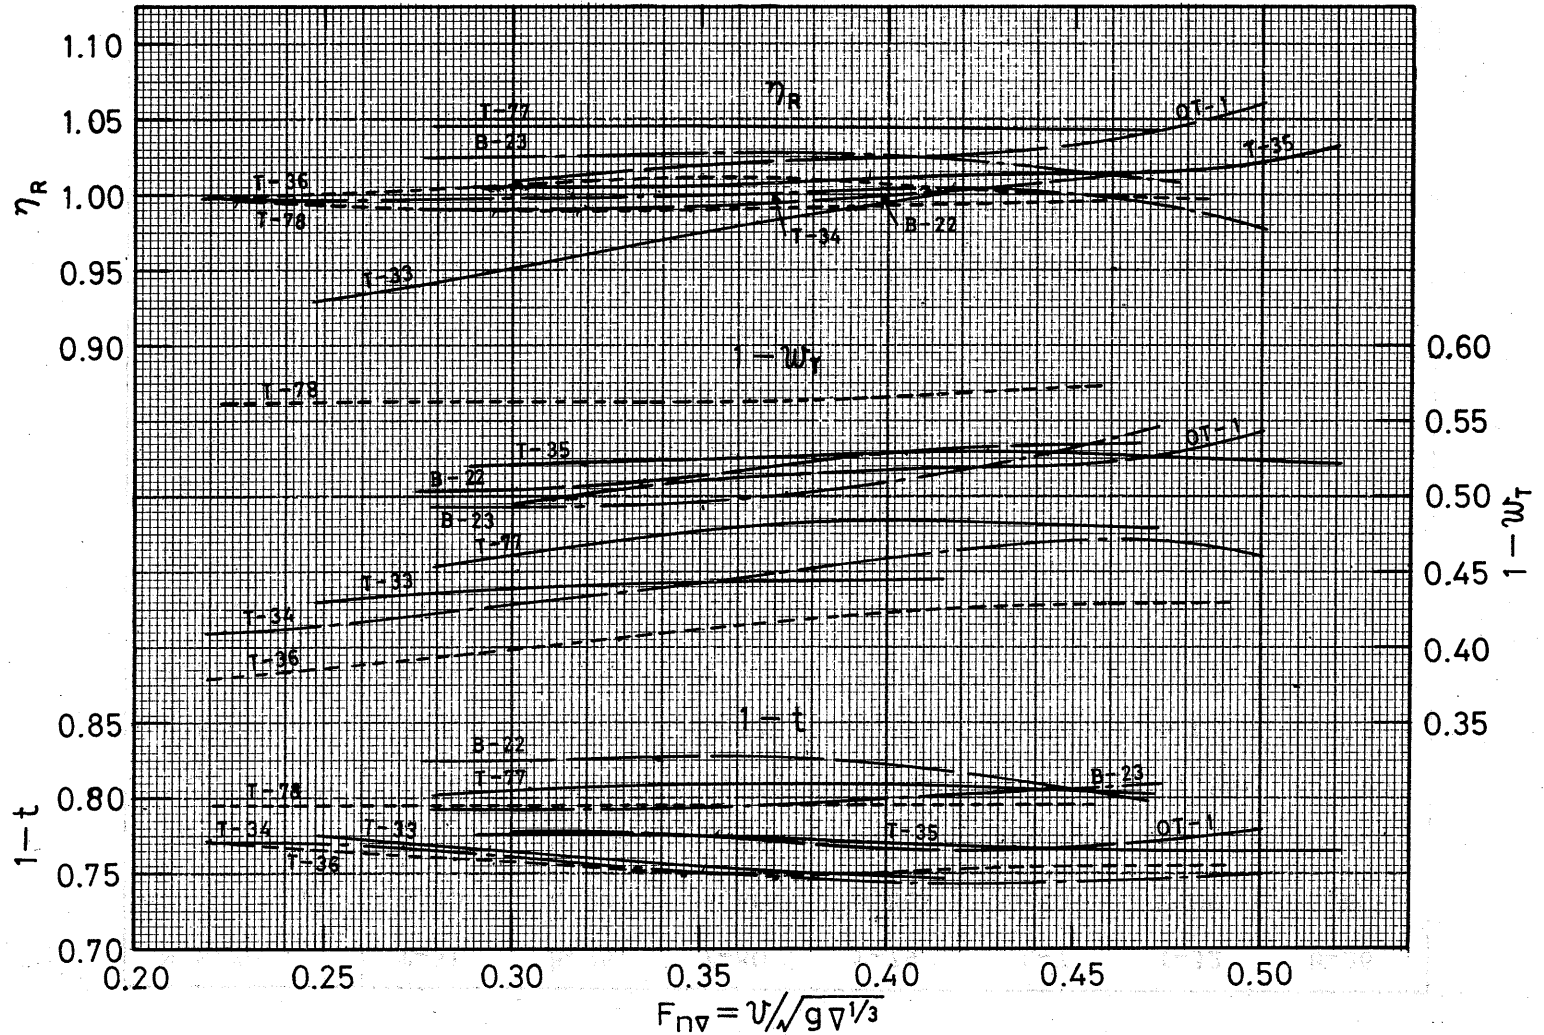


Fig.18  $C_B = 0.803$  &  $0.804$

Table 19  $C_B=0.805$ 

M.S.No.	T-31	B-25	T-80	T-79	O-7	T-32	B-26
L (m)	6.50	6.20	6.80	6.80	6.50	7.00	5.60
$C_B$	0.805	0.805	0.805	0.805	0.805	0.805	0.805
$l_{CB}$ (%)	-1.60	-1.97	-1.95	-2.31	-2.10	-1.98	-1.60
L/B	6.87	7.14	6.47	6.43	6.72	6.65	7.19
B/d	2.66	2.44	2.94	2.95	2.64	2.68	2.12
$\nabla/(0.1L)^3$	6.40	6.47	6.53	6.60	6.68	6.81	7.34
$S/\nabla^{2/3}$	6.24	6.27	6.31	6.34	6.22	6.19	6.09
$A_B/A_M$ (%)	5.30	2.99	4.15	10.29	5.70	4.19	8.30
$d_B/d$ (%)	77.1		79.3	75.6	82.9	78.7	
l/L (%)	0	0	0	1.70	0	0	0
$D_P/0.01L$	3.15	3.24	2.87	2.68	3.00	2.72	3.38
I/ $D_P$	1.12	1.15	1.17	1.27	1.27	1.34	1.30
Stem form	VB	C	VB	B	VB	VB	C
Stern form	G	G	G	G	G	G	G
Rudder	S	S	R	R	C	R	S
Marks	—	—	—	—	—	—	—



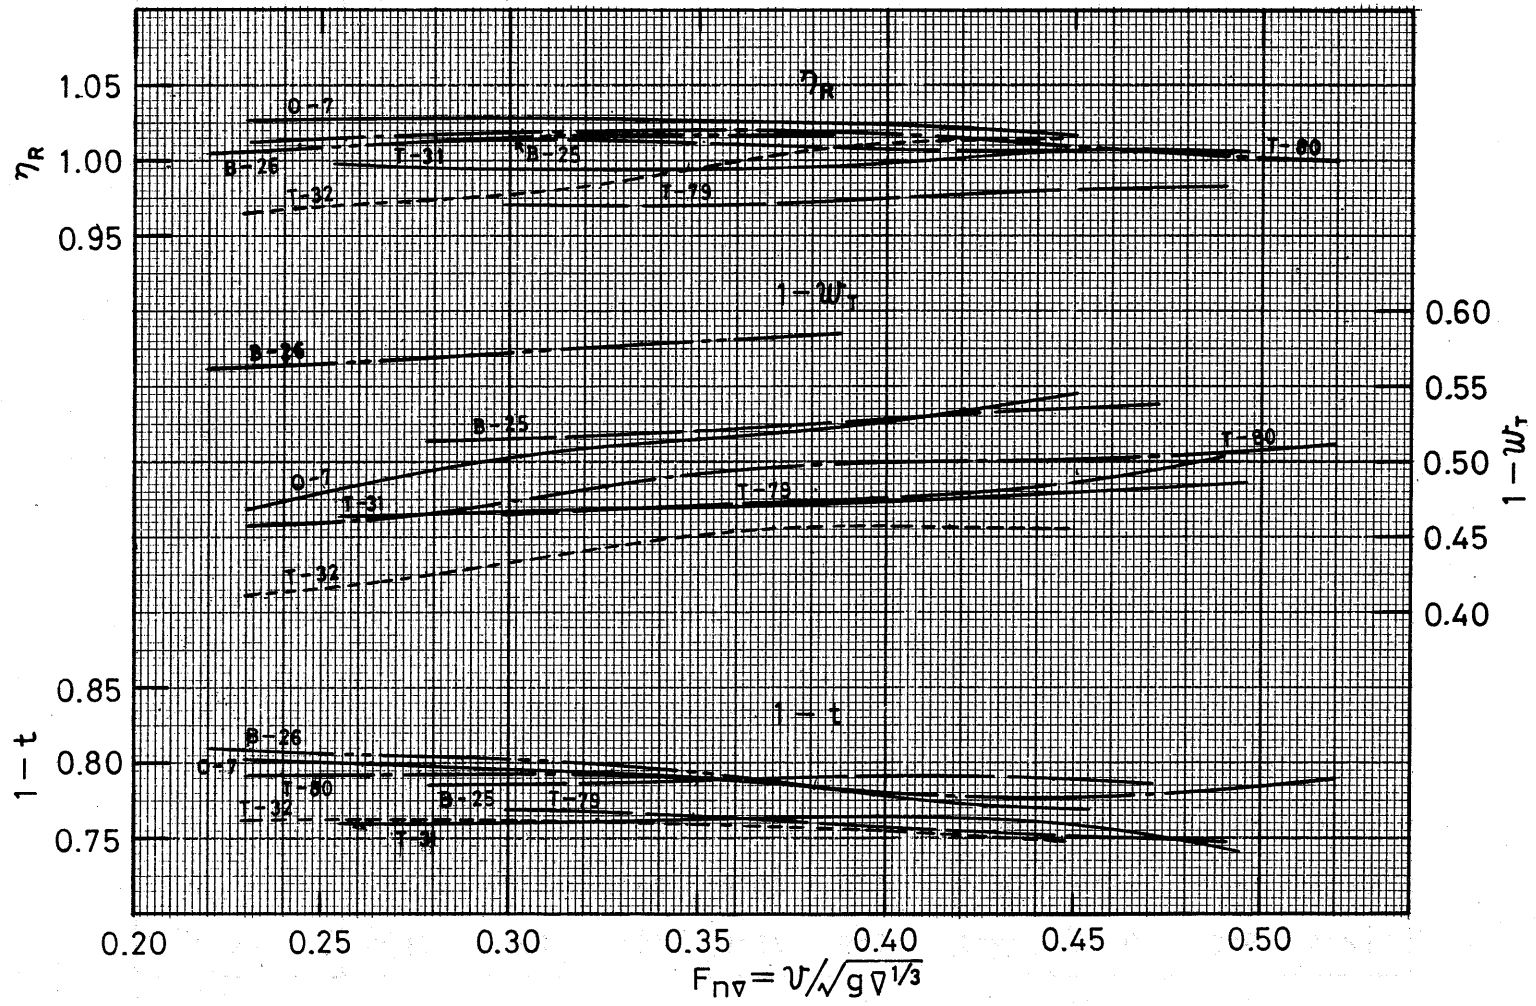


Fig.19  $C_B = 0.805$

Table 20

 $C_B=0.806$  &  $0.807$ 

M.S.No.	B-30	T-82	B-31	B-27	B-28	T-81	T-30	O-6	T-83
L (m)	6.20	6.30	5.90	6.00	6.50	6.50	6.80	6.50	5.50
$C_B$	0.806	0.806	0.806	0.806	0.806	0.806	0.807	0.807	0.807
$l_{CB}$ (%)	-1.84	-2.14	-2.20	-2.00	-2.90	-2.20	-2.07	-1.00	-2.27
L/B	7.11	6.34	6.59	6.72	6.13	6.18	6.91	6.90	6.54
B/d	2.43	2.93	2.67	2.51	2.97	2.71	2.79	2.67	2.75
$\nabla/(0.1L)^3$	6.59	6.85	6.93	7.11	7.24	7.77	6.06	6.36	6.87
$S/\nabla^{2/3}$	6.23	6.27	6.29	6.15	6.19	6.15	6.35	6.33	6.20
$A_B/A_M$ (%)		4.22	12.17	8.44	7.20	10.13		5.08	6.19
$d_B/d$ (%)		62.8	66.6		67.1	69.9		76.1	71.7
$l/L$ (%)		0.68	1.50	0	1.63	1.70		0	0.82
$D_P/0.01L$	3.30	3.10	3.09	3.34	2.91	2.69	2.80	3.15	3.72
$I/D_P$	1.12	1.09	1.20	1.15	1.23	1.51	1.16	1.16	0.83
Stem form	V	B	B	C	B	B	LR	VB	B
Stern form	G	G	G	G	G	G	G	G	G
Rudder	S	R	R	R	S	R	S	S	S
Marks	_____	_____	-----	-----	-----	-----	-----	-----	-----